

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number  
**WO 2005/071780 A1**

(51) International Patent Classification<sup>7</sup>: **H01M 8/02**,  
8/10, 8/24

(21) International Application Number:  
PCT/JP2005/001314

(22) International Filing Date: 25 January 2005 (25.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-018878 27 January 2004 (27.01.2004) JP

(71) Applicant (for all designated States except US): **CANON  
KABUSHIKI KAISHA** [JP/JP]; 3-30-2, Shimomaruko,  
Ohta-ku, Tokyo 1468501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOGI, Satoshi**

[JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2,  
Shimomaruko, Ohta-ku, Tokyo 1468501 (JP). **SHIBATA,**  
**Masaaki** [JP/JP]; c/o CANON KABUSHIKI KAISHA,  
3-30-2, Shimomaruko, Ohta-ku, Tokyo 1468501 (JP).


(74) Agents: **OKABE, Masao** et al.; No. 602, Fuji Bldg., 2-3,  
Marunouchi 3-chome, Chiyoda-ku, Tokyo 1000005 (JP).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: FUEL CELL UNIT

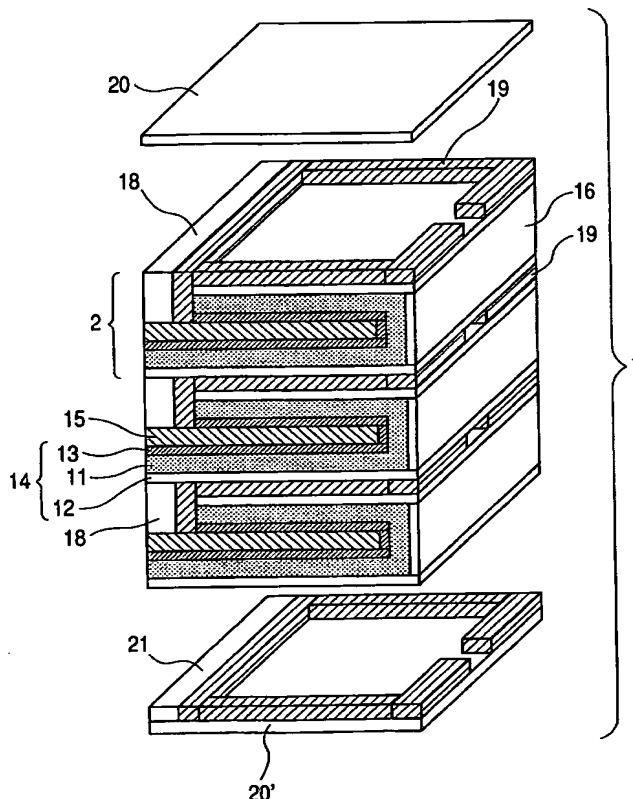

(57) Abstract: A fuel cell unit is provided which comprises at least one structural member, the structural member comprising two electrolyte/electrode bonded members (14) each comprising a first electrode (13) and a second electrode (12) and an electrolyte membrane (11) disposed between the electrodes, a conductive porous substrate (15) disposed between the two electrolyte/electrode bonded members (14) so as to be in contact with the two first electrodes (13) of the two electrolyte/electrode bonded members, a conductive support member (18) provided on the porous substrate (15) so as to be electrically connected to the porous substrate (15) and the two first electrodes (13), and an electrical connection means (16) for electrically connecting the two second electrodes (12) being not in contact with the porous substrate of the electrolyte/electrode bonded members, and which attains size reduction, has as less wiring as possible, and gives a large electromotive force.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*